

Scraplights

Ausi Pendant




Color



Natural

Ausi 8 | GP-112
Ausi 12 | GP-111
Ausi 14 | GP-113



White

Ausi 8 | GP-1112
Ausi 12 | GP-1111
Ausi 14 | GP-1113



Blonde

Ausi 8 | GP-2112
Ausi 12 | GP-2111
Ausi 14 | GP-2113

	North America	Europe
Lamping	Max 15W LED, E26, 120V, not included Optional Integrated LED	Max 15W LED, E27, 220V, not included
Color temperature	2700K (recommended)	2700K (recommended)
Lumen output	Dependent on lamp	Dependent on lamp
Cord	Black, 6.5ft (16ft available) White, 6.5ft (16ft available)	Black fabric, 2m (5m available) White fabric, 2m (5m available)
Canopy	Black powder coated, Ø 4.5, H 3/8 (in) White powder coated, Ø 4.5, H 3/8 (in)	Black powder coated, Ø 10, H 2.5 (cm) Gray powder coated, Ø 10, H 2.5 (cm)
Material	Recycled corrugated cardboard Corrugated cardboard	Recycled corrugated cardboard Corrugated cardboard
Size	Ø 7, H 9 (in) Ø 15, H 14 (in) Ø 11, H 8 (in)	Ø 19, H 24 (cm) Ø 28, H 20 (cm) Ø 39, H 36 (cm)
Weight	0.9lbs 1.2lbs 1.5lbs	0,4kg 0,6kg 0,7kg
Fire retardant	Yes	Yes
Country of origin	United States	The Netherlands
Certification		


Dry locations only. Clean with a dry duster or compressed air. Shades are non-toxic, handmade, and manufactured using responsible practices.

**Designed in Seattle,
Washington, USA.**


Custom cords and canopies are available. Contact our offices for more information.

scraplights®


Ausi Pendant



AUSI8

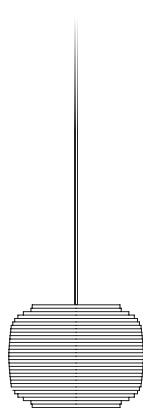

AUSI12

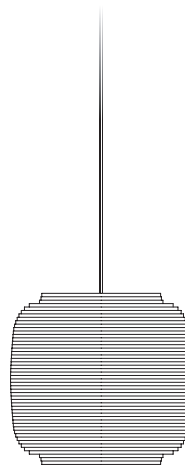

AUSI14

SPECIFICATION CODE

Example: QTY 2 SCRAP - GP1111-WHT-16-INT



Qty.

SCRAP -



①

②



③



④




⑤

For each number, make one selection and enter into the corresponding box above. *Indicates modification with additional lead time and/or costs

① MATERIAL


- ☐ 1
- ☐ 11
- ☐ 21



1 - Natural



11 - White



21 - Blonde

② LENGTH

- ☐ 12
- ☐ 11
- ☐ 13

8"

12"

14"

③ CANOPY/CORD

- ☐ BLK
- ☐ WHT

Black

White

④ CORD LENGTH

- ☐ STD
- ☐ EXT

6.5 ft

16 ft

⑤ LAMPING

- ☐ E26
- ☐ INT

E26 Socket
Max 15W LED, E26 base, 120V, not included

Integrated LED*
12W COB LED, 0-10v dimming to 1%
80CRI, 120-277V, 2700K